

BIFACIAL PERC MONOCRYSTALLINE • 120PMB12

Half Cut

DOUBLE GLASS



High Conversion Efficiency

High panel efficiency to guarantee high power output



Self-Cleaning And Anti-Reflection Glass

Coating glass for self-cleaning reduces surface dust



Outstanding Low Irradiation Glass

Outstanding panel performance even in weak light conditions



Excellent Durability

Wind load up to 2400 Pa, Snow load up to 5400 Pa




0~+5W Positive Power Tolerance




Easy Installation



Twice EVA Laminated Double Glass

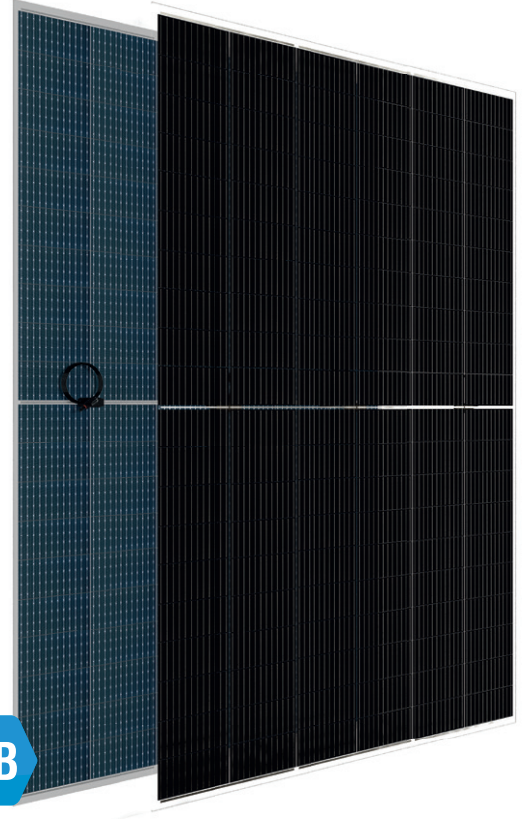

12BB

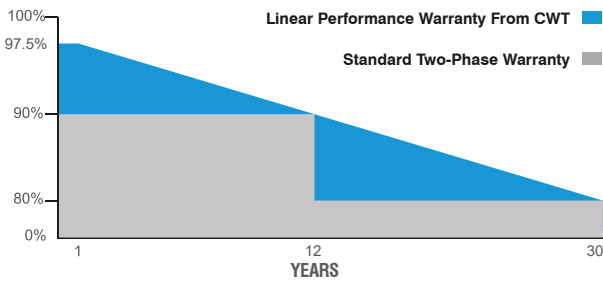

30 Years Performance Warranty



12 Years Product Warranty

CWT610-120PMB12 610 Wp

CWT605-120PMB12 605 Wp

CWT600-120PMB12 600 Wp

CWT595-120PMB12 595 Wp

CWT590-120PMB12 590 Wp

30
YEARS
PERFORMANCE
WARRANTY



ISO 9001:2015, ISO 14001:2015, ISO 45001:2018


ELECTRICAL CHARACTERISTICS

Model Type	CWT590 120PMB12	CWT595 120PMB12	CWT600 120PMB12	CWT605 120PMB12	CWT610 120PMB12
Peak Power (Pmax)	590Wp	595Wp	600Wp	605Wp	610 Wp
Module Efficiency	20.85	21.02	21.20	21.38	21.55
Maximum Power Voltage (Vmp)	34.10	34.20	34.30	34.50	34.70
Maximum Power Current (Imp)	17.30	17.40	17.50	17.54	17.58
Open Circuit Voltage (Voc)	41.10	41.30	41.50	41.70	41.90
Short Circuit Current (Isc)	18.33	18.43	18.53	18.58	18.62
Power Tolerance	0~+5W				
Maximum System Voltage	1500V DC				
Operating Temperature	-40 ~ +85°C				
Fire Safety Class	C				
Maximum Series Fuse Rating	35A				

MECHANICAL SPECIFICATIONS

Cell Dimensions(mm)	210x105
Cells per Module(pcs)	120 (6x20)
Weight(kg)	36.0
Panel Dimensions(mm)	2172x1303x35
Max. Wind/Snow Load(Pa)	2400/5400
Junction Box	IP68
Junction Box Cable Length(mm)	350-1600
Glass Thickness(mm)	2.0 / 2.0

PHYSICAL CHARACTERISTICS

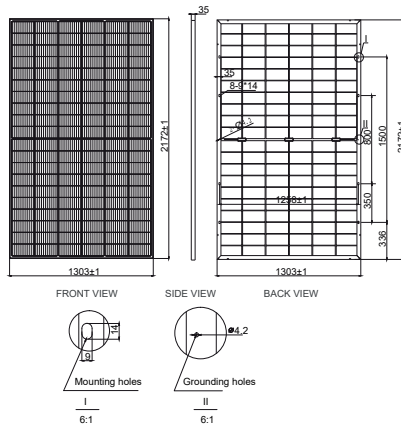

TEMPERATURE CHARACTERISTICS

(600W Front Power Referenced)

Rear Side Power Gain	5%	10%	15%	20%	25%
Peak Power (Pmax)	630	660	690	720	750
Short Circuit Current (Isc)	19.28	20.20	21.12	21.91	22.82
Open Circuit Voltage (Voc)	41.70	41.70	41.70	50.00	60.00
Maximum Power Current (Imp)	18.16	19.02	19.88	20.63	21.49
Maximum Power Voltage (Vmp)	34.70	34.70	34.70	34.90	34.90


TEMPERATURE CHARACTERISTICS

Temp. Coeff. of (Isc)	0.040%/°C
Temp. Coeff. of (Voc)	-0.260%/°C
Temp. Coeff. of (Pmax)	-0.340%/°C

PACKING CONFIGURATION

Container	40' GP
Pieces per Pallet	31
Pieces Per Container	527
Pallet Per Container	17

ELECTRICAL CHARACTERISTICS

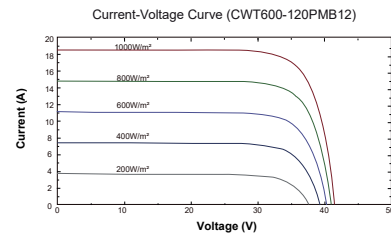

* The specifications are obtained under the standard test conditions: 1000W/m² solar irradiance, 1.5 Air Mass and cell temperature of 25°C. Measurement uncertainty for all panels is 3%. The actual transactions will be subject to the contracts. These parameters are for reference only and it is not a part of the contracts. The technical specifications in this document may vary. For more information, refer to the "Installation Manual".

* For roof, facades and installations on similar surfaces, solar panels should be mounted over a fire-resistant covering suitable for this application, with adequate ventilation between the back of the solar panels and the mounting surface. Improper installations are hazardous and may spark a fire. Solar panels must not be mounted on structures and roofs which are made of not fire-resistant materials such as plastic layer, transparent plastic, PVC or similar materials without any fire-protection layer. Usage and installation not in accordance with the guidelines as outlined in the installation manual will terminate the warranty. Please refer to the installation manual and the warranty documents for further details.

* CW Enerji reserves the right to change the specification of products without prior notice.